


NV-3000-Lite/ 5000-Lite

PC Cards - Hybrid NVR Solution

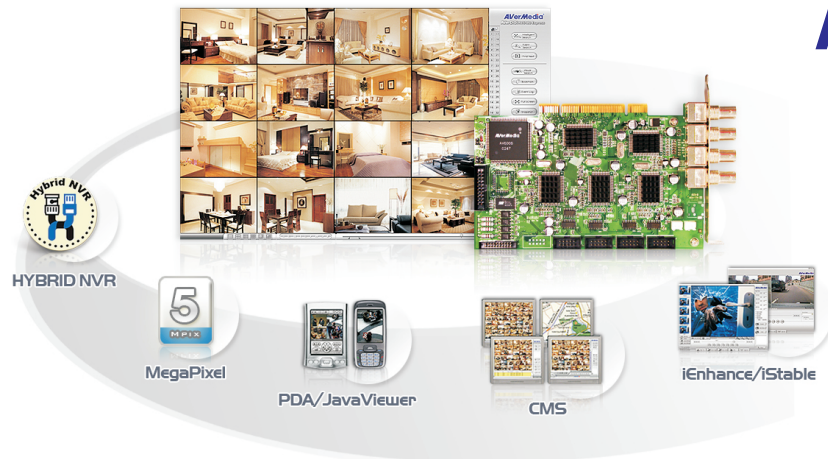

- Advanced Alarm Management
- All Major Brands of IP Camera Supported
- Wide Screen Resolution up to 1920 x 1200 Supported
- Support High Resolution Megapixel IP Camera up to 5 Mpix
- Support IP PTZ Camera and Analog PTZ Camera
- USB Update for DVR System Upgrade Supported
- Comprehensive Remote Access Integration
- Up to 10 Sec. Pre-alarm Recording

SPECIFICATIONS

| MODEL | NV-3000-Lite | | | | NV-5000-Lite | |
|----------------------------------|--|-----|------|-------|--|-----|
| Operating System | Windows XP, Windows Vista | | | | | |
| Interface | PCI Interface | | | | | |
| Video Card (Stackable Structure) | 1 | 2 | 3 | 4 | 1 Main Card + 3 Optional Video Extension Cards | |
| Video Input | 4 | 8 | 12 | 16 | 4, 8, 12, 16 | |
| Video Format | H.264/ MPEG4/ MJPEG | | | | | |
| Compression | Software Compression | | | | | |
| Video Resolution | 352 x 240, 640 x 480, 720 x 576 | | | | | |
| Audio Input | 1 | 2 | 3 | 4 | 4 | |
| Display Frame Rate | 25 | 50 | 75 | 100 | 100 | |
| Recording Frame Rate | D1 | 6 | 12 | 18 | 24 | 25 |
| | CIF | 25 | 50 | 75 | 100 | 100 |
| Sensor Input/ Relay Output | 4/3 | 8/6 | 12/9 | 16/12 | 4/3 | |
| | Optional I/O Extension Card | | | | | |
| IP Camera Access | 1 | 1 | 1 | 1 | 4 | |
| | No Megapixel Supported | | | | | |
| Overheat Detection | N/A | | | | | |
| Remote Access | CMS, WebViewer, Remote Console, PDAViewer, JavaViewer, Smart and HandyViewer | | | | | |
| Web Tools | Dispatch Server, Remote Backup, Remote Setup, Remote iMatrix (Coming Soon) | | | | | |
| Dimensions | 167.6 (W) x 105.0 (H) mm | | | | | |

Specifications are subject to change without notice